



HR24A

Compact Undercounter Reach-in Refrigerator



HR24A
8/14
Item #13278

Hoshizaki America, Inc. reserves the right to change specifications without notice.

Item #

Project:

Qty:

*AutoCad available on KCL

HR24A Dimensions W x D x H

1 Section - 23.4" x 24.5" x 32.7"*

*with legs

Electrical/Refrigeration

Voltage - 115/60/1

HACR Breaker - 15.0

Electrical Connection - 5-15P
(NEMA)

Voltage Range 104 - 127

Ambient Temp. Range 60° - 95°F

Control Setpoint Range 34°-50°F

*Refrigerant R-134A

Warranty

Valid in United States, Canada, Puerto Rico, and U.S. Territories. Contact factory for warranty in other countries.

- **Three Year** - Parts & Labor on entire machine.

Options

- Epoxy shelves
- Glass shelves



Intertek

ISO 9001 • ISO 14001

- Stainless steel exterior
- UL approval for outdoor use
- Energy efficient, one piece ABS interior liner
- Door is stainless steel exterior, aluminum interior and is field reversible
- Magnetic door gasket is easily removable for cleaning
- Environmentally friendly cyclopentane insulation
- Electronic controls with LED Temperature Display and Audio/Visual Alarm
- High and low temperature alarms as well as "Door Open" alarm
- Ducted air flow for even air distribution throughout the cabinet
- Cylinder door lock with keys
- Automatic defrost
- (3) Epoxy coated shelves standard
- Built-in cabinet installation with louvered trim

* HR24A is ENERGY STAR qualified

Dimensions / Capacity

Model #	One Section HR24A
Interior Storage Capacity (CF) (AHAM)	4.0 ft ³
Amperage	2.0
Energy Consumption (kwh/day) ENERGY STAR	0.378
Overall Width x Depth	23.4" x 24.5"
Height	32.7"
Adjustable Shelves	3
Shelf Dimensions (W x D)	(1) 19.13" x 17", (2) 19.13" x 12"
Crated Shipping Weight	102 lbs




© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269
TEL 800-438-6087
FAX 800-345-1325
www.hoshizaki.com



HR24A

Compact Undercounter Reach-in Refrigerator

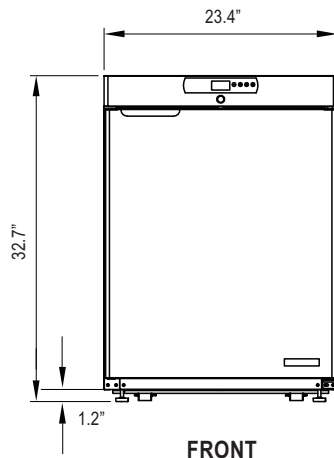

***For Built-In Applications:**
Allow 1.2" (30mm) at top for
stainless steel louvered vent
(supplied with unit).

