
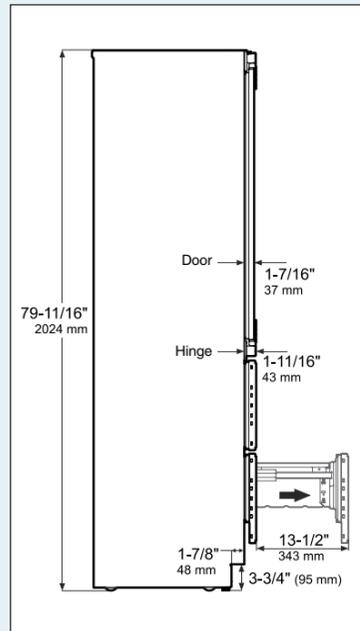
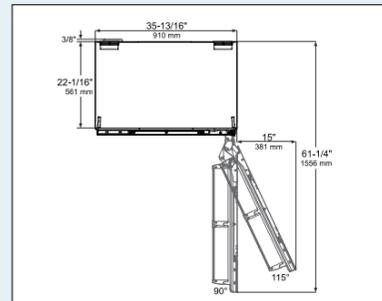


## Diagrams

36"


### Unit Dimensions

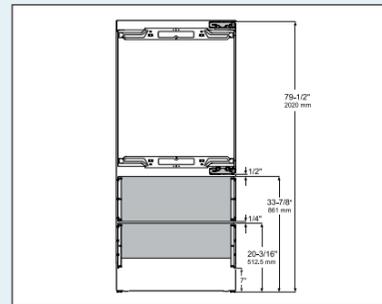

Allow door swing clearance at locations next to a wall. The refrigerator door must open to a minimum of 90° to allow the crispers to open and the shelves to be removed.

Height can be increased by 1-1/2" (40 mm) by turning the levelling feet at the front and the height adjustable roller units at the appliance rear.


### Cabinet Opening Dimensions

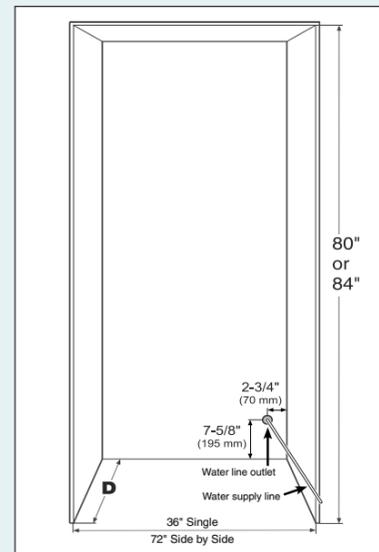

Inset cabinet Depth D	Frameless cabinet Depth D
24" + panel thickness	24"

Factory available stainless steel panels are designed for an inset installation only and require a cabinet / gable depth of 24 - 3/4".

### Panel Dimensions

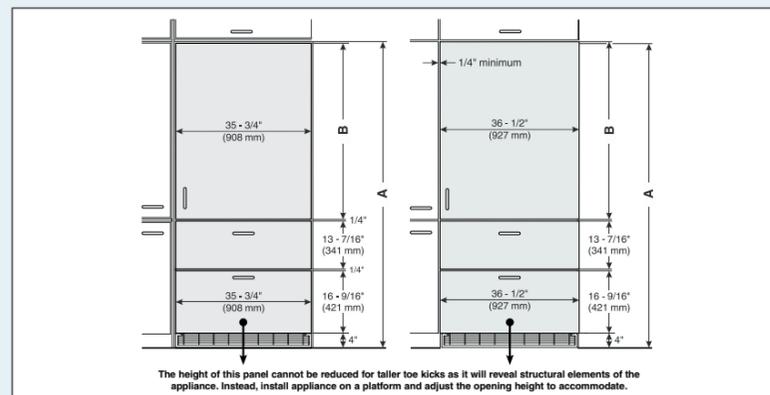

#### Inset Installation Style

Minimum panel thickness is 5/8" (16 mm).  
Maximum panel thickness is 1-1/2" (38 mm).  
Maximum weight of the refrigerator panel is **60 lbs** (27 kg).  
Maximum weight of each freezer panel is **26.5 lbs** (12 kg).

Cabinet opening A	Refrigerator door panel B
80"	45-1/4" (1150 mm)
84"	49-1/4" (1251 mm)

#### Frameless Installation Style

Minimum panel thickness is 5/8" (16 mm).  
Maximum panel thickness is 1-1/2" (38 mm).  
Maximum weight of the refrigerator panel is **60 lbs** (27 kg).  
Maximum weight of each freezer panel is **26.5 lbs** (12 kg).

Cabinet opening A	Refrigerator door panel B
80"	45-3/4" (1162 mm)
84"	49-3/4" (1264 mm)

### Ventilation Requirements



The appliance do not require ventilation considerations in the cabinetry. The required airflow is directed through the toe kick base. It is important to use the provided cover grille for the ventilation opening. This opening must not be covered.



## Liebherr HCB 2060

Fully Integrated/Seamless



# LIEBHERR

Quality, Design and Innovation

## Fully Integrated/Seamless

Show off the materials and design of your custom kitchen to the fullest with the stylish fully integrated **HCB 2060**. The new 36" single door model features strong hinges for a convenient closing of doors as well as LED lighting and elegant GlassLine shelving including door storage of gallon containers. The two BioFresh drawers are individually usable as HydroSafes with high humidity or as DrySafes with low humidity to enable versatile storage. In this way the ideal climate is provided for all varieties of food. An automatic IceMaker featuring the most technically advanced water filter provides an abundant supply of perfect crescent ice.



◀36"▶

## Fully Integrated/Seamless

### Energy consumption

in 365 days kWh  
Estimated Yearly Energy Cost in US \$

### Capacity

Total capacity cu.ft. (l)  
Refrigerator comp. cu.ft. (l)  
BioFresh comp. cu.ft. (l)  
NoFrost Freezer comp. cu.ft. (l)

### Shipping weight lbs. (kg)

### Climate rating

### Sound rating dB(A)

### Ice cube output lbs. (kg) / 24h

### Ice cube stock lbs. (kg)

### Door hinges

### Outside dimensions

in inches (cm) H/W/D

### Cut out dimensions

in inches (cm) H /W/D

### Energy supply

Voltage V/Hz

## HCB 2060 PremiumPlus



556

67\*

18.9 (535)

12.8 (365)

2.5 (69)

6.0 (170)

396.8 (180)

SN-T

43\*\*

4 (1.8)

10 (4.5)

right

79 13/16" / 35 7/8" / 24 1/16" (202.7 / 91 / 61)

80" / 36 1/16" / 24 5/8" (203.2 / 91.5 / 62.5)

115/60

\* Energy Cost will depend on utility rates and use. Estimated energy cost based on a national average electricity cost of 12 cents per kWh.

\*\* Noise output – according to EN 60704-3

## Features

◀36"▶



**German Engineering:** Our superior products offer premium quality, cutting edge design and innovative features that fit your busy lifestyle. Exclusive components and materials, along with the latest production processes, ensure energy efficiency and performance for years to come.



**Energy Star:** Liebherr refrigerators help produce less energy waste and greenhouse gas emissions with the goal of having the least damaging effect on the environment, while offering solutions that help consumers conserve energy.



**BioFresh:** BioFresh guarantees the perfect climate for super-long-term freshness. Each drawer can be used individually and provides ideal humidity – HydroSafes with high humidity or DrySafes with low humidity – for a versatile storage solution of meats and cheeses as well as fruits and vegetables.



**DuoCooling:** The dual refrigeration system creates optimal conditions in both the refrigerator and freezer which lengthens the shelf life of food items for a healthier lifestyle. This technology also preserves the flavor and texture of foods since there is no transfer of unwanted air, moisture or food aroma between the two compartments.



**SuperCool/SuperFrost:** Simply quick chill and or freeze fresh groceries to preserve optimum freshness and seal in flavors, textures as well as maintain essential vitamins and minerals.



**SuperQuiet:** Noise is kept to a minimum with virtually silent, speed controlled compressors and a low nose cooling circuit; while also ensuring exact performance, energy efficiency and SuperQuiet operation.



**GlassLine:** The elegant yet tough GlassLine shelves are scratch resistant and easy to clean as well as dishwasher safe. The space-saving shelves are designed for organization and are completely adjustable to suit your needs and the contents of the refrigerator. Additionally, the lighting shines through for a brighter interior.



**LED:** Distinctive LED light columns are integrated into both sides of the compartment liner. Inside the columns are numerous cool LED lights that ensure uniform lighting throughout the interior.



**Gallon Storage on door:** A Liebherr is designed to fit more cubic feet of your everyday life. The durable yet elegant GlassLine door racks easily accommodate a large supply of milk or juice on hand.