

PM 12 Ironer Series



A new generation of ironers

Thoroughly cleaned and perfectly ironed table and bed linens are a key "feel-good" factor that keeps every guest cheerful and relaxed during visits to hotels, restaurants, nursing homes, and other establishments.

Available in three sizes and equipped with innovative product features and high-quality components, the Miele PM 12 ironer series sets new standards in laundry care.

Perfect laundry finish


- Adjustable temperature and speed settings
- Uniform contact pressure across entire roller length, thanks to hydraulic trough suspension, for perfect creases and crisp lines
- Aluminum trough allows short heat up times and even distribution
- Roller padding with Aramid needle felt cloth; optional leaf-spring padding available
- Perforated outfeed table for automatic air circulation and laundry cooldown

Ease of operation

- Large touchscreen display for simple program selection and easy access to important functions
- Freely positionable footswitch for fast and convenient ironer operation
- Finger guard provides operation safety

Perfect ergonomics

- Comfortably work in a seated or standing position thanks to adjustable working heights
- Easy operation by a single person; PM 1217 allows both single and two person operation
- Airing bar to easily hang linens without creases

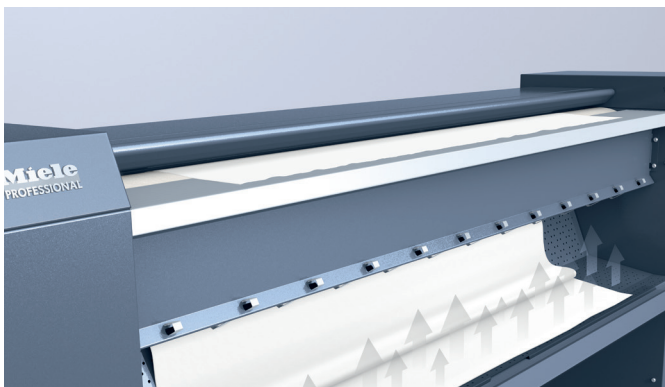


Trust the experts

Miele Professional meets the highest demands in laundry care while leading the way in the development of innovative technology.

Miele's complete laundry systems include washers, dryers and ironers that provide outstanding performance, capacity, and speed to showcase our 6 decades of laundry development.



PM 12 Ironer Series

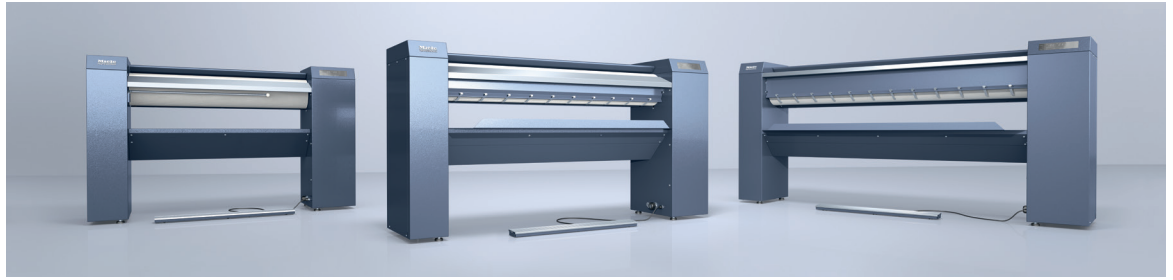

| Ironers | PM 1210 | PM 1214 | PM 1217 |
|------------------------|---|---|--|
| Roller Diameter | 8" | 8" | 10" |
| Roller Length | 39" | 55" | 65" |
| Ironing Speed | 59 - 158 inch/min | 59 - 158 inch/min | 59 - 177 inch/min |
| Ironing Throughput | 50 lbs/hour with 15% Residual Moisture | 62 lbs/hour with 25% Residual Moisture | 110 lbs/hour with 25% Residual Moisture |
| External Dimensions | 41"H x 62"W x 19"D | 41"H x 78"W x 26"D | 44"H x 88"W x 26"D |
| Working Height | 36" - 39" | 36" - 39" | 40" - 43" |
| Number of Operators | One | One | One or Two |
| Weight | 269 lbs | 309 lbs | 417 lbs |
| Heating Type | Electric | Electric | Electric |
| Heating | Standard: 3.3 kW | Standard: 7.1 kW | Standard: 11.8 kW |
| | Optional: 2.5/2.7 kW | Optional: 5.3/6.0 kW | Optional: 8.9/9.9 kW |
| Electrical Connection* | Standard: 2 AC 240V 60Hz | Standard: 3 AC 240V 60 Hz | Standard: 3 AC 240V 60 Hz |
| | Optional: 2 AC 208V 60Hz | Optional: 3 AC 208V 60 Hz | Optional: 3 AC 208V 60 Hz |
| | Optional: 2 AC 220V 60Hz | Optional: 3 AC 220V 60Hz | Optional: 3 AC 220V 60Hz |
| Total Rated Load | Standard: 3.7 kW | Standard: 7.6 kW | Standard: 12.4 kW |
| | Optional: 2.9/3.2 kW | Optional: 5.9/6.5 kW | Optional: 9.4/10.5 kW |
| Fuse Rating | 2 x 20 Amps | 3 x 30 Amps | 3 x 50 Amps |
| Vent Connection | n/a | 2 ¾" | 2 ¾" |
| Leaf-spring Padding | n/a | n/a | Optional |
| Airing Bar | Standard | Optional | n/a |
| 4" Base | Optional | Optional | Optional |

*Units come with a pig tail