




- Marine grade, powder coated aluminium, stainless steel and other non-corrosive materials
- Brilliant international award winning design
- Up & down in 'one easy sliding movement'
- Effortless gas strut assisted deployment
- Umbrella rotates 360°
- Durable, heavy-duty aluminium mast
- Premium 100% solution dyed Acrylic Canvas fabric canopy (UPF 50+)

FIXING OPTIONS

- | | |
|--|---|
| <input checked="" type="checkbox"/> In-ground Anchor | <input checked="" type="checkbox"/> Portable Base |
| <input checked="" type="checkbox"/> Surface Plate | <input checked="" type="checkbox"/> Wall Fixing |


ROTATING

GROUND MOUNTED
(Square or Octagon)



ROTATES 360°


WALL MOUNTED
(Square or Octagon)



ROTATES 180°


SIZES

2.5m / 8'2"
3.0m / 9'10"



SQUARE

3.5m / 11'6"



OCTAGON

WARRANTY*

5 year
FABRIC CANOPY
warranty

*Conditions Apply

TRUSTED
FOR OVER 21 YEARS

FABRIC COLOR



ARCTIC WHITE



WHITE SAND



BUTTERCUP



BITTER ORANGE



TERRACOTTA



TAUPE



MIDNIGHT BLUE



OLIVE GREEN



BLACK WIDOW



SLATE GREY



CHARCOAL



RED




CHARCOAL TWEED
(available from Jan 2017)

DICKSON

MAST



Key Dimensions:

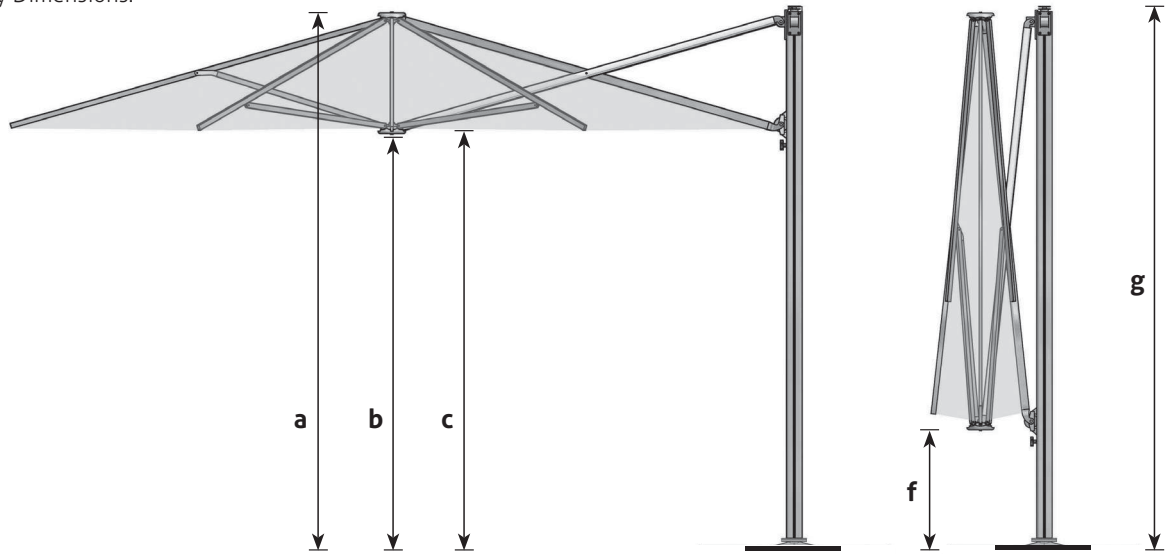

	2.5m/8'2" Square	3.0m/9'10" Square	3.5m/11'6" Octagon
Dimensions of open umbrella			
a: Total height to top of canopy *	+/- 114"	+/- 114"	+/- 114"
b: Distance from ground to central frame hub *	+/- 89"	+/- 88"	+/- 89"
c: Height to lower outer edge of canopy *	+/- 91"	+/- 90"	+/- 91"
d: Distance from centre of mast to outside edge of canopy **	+/- 101"	+/- 121"	+/- 143"
e: Diagonal distance from centre of mast to opposite / furthest corner of umbrella (diameter) *	+/- 143"	+/- 172"	+/- 143"
Dimensions of closed umbrella			
f: Distance from ground to central frame hub *	+/- 36"	+/- 22"	+/- 36"
g: Overall height of umbrella to top of mast cap *	+/- 114"	+/- 114"	+/- 114"


* For the portable base, add 4.7" to measurement. (Note: optional portable base wheels also add additional height over and above the normal portable base height).

** Refer plan diagrams in table.

INSTALLATION OPTIONS:



IN-GROUND ANCHOR




SURFACE PLATE



*Only available in main centres.
Inquire about availability in your region.



Approximate weight with:
- 8 pavers 130kg/287 lb
- 12 pavers 185 kg/408lb

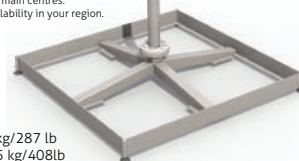

PORTABLE BASE

Note: Requires concrete pavers (not supplied) for anchoring weight



Top

Bottom

WALL FIXING