



# 42-INCH FOUR-DOOR FRENCH DOOR PANEL-READY

DRF425300AP



## PRODUCT FEATURES

- ◇ True flush Four-Door with cabinet height freezer doors for seamless cabinet integration
- ◇ Triple Cooling - Three Cooling Systems, powered by dual digital inverter compressors keep food fresher longer
- ◇ FreshZone™ Plus Compartment - Convert from freezer to refrigerator for flexibility that fits your needs
- ◇ MetalCool™ Interior illuminated by 3DLighting™
- ◇ FreshZone™ Drawer with three customizable temperatures for Meat/Fish, chilled drinks and dairy
- ◇ Works with 41 1/2" classic and 42" full cutout widths

## DIMENSIONS & WEIGHT

APPLIANCE DIMENSIONS  
(H X W X D) (IN.)(3 EVAPORATORS,  
2 COMPRESSORS)

83 3/8" X 41 1/4" X 23 13/16"

REQUIRED CUTOUT SIZE  
(HXWXD) (IN.)

FLUSH INSTALLATION:  
84" X 42" X MIN. 25" (3/4" PANEL)  
CLASSIC INSTALLATION: 84" X  
41 1/2" X 24" (PANEL THICKNESS  
PROTRUDING)

NET WEIGHT (LBS)

655

## GENERAL PROPERTIES

PANEL READY	YES
PUSH-TO-OPEN™ DOOR ASSIST	NO
INTERNAL WATER DISPENSER	YES
ICEMAKER	STANDARD ICE
IQ REMOTEVIEW™ CAMERA	NO
DEODORIZING FILTER	YES
LIGHTING	3DLIGHTING™
INTERIOR MATERIAL	METALCOOL™ INTERIOR
FULL WIDTH SHELVES - REFRIGERATOR	1 EA
ADJUSTABLE SHELVES - REFRIGERATOR	4 EA
SHELF MATERIAL - REFRIGERATOR	TEMPERED GLASS SPILL-PROOF SHELVES
FULL EXTENSION DRAWERS AT 90° DOOR OPENING ANGLE	YES
FRESHZONE™ DRAWER	YES - CHEESE (37°F) / COLD DRINKS (33°F) / MEAT (29°F)
CRISPER DRAWERS	2 EA
FRESHZONE™ PLUS COMPARTMENT	YES - CONVERTS FROM FREEZER -8°F TO TO REFRIGERATOR 33°F
DOOR BINS -REFRIGERATOR	6 EA
FREEZER DRAWERS	4 EA
DOOR OPEN ALARM	YES
IQ REMOTE DIAGNOSTICS™ (WI-FI)	YES
SPECIAL MODES	SABBATH MODE

## CAPACITY

TOTAL UNIT GROSS CAPACITY (CU.FT.) - AHAM	23.5 CU. FT.
REFRIGERATOR GROSS CAPACITY (CU.FT.)	16.8 CU. FT.
FREEZER GROSS CAPACITY (CU.FT.)	6.7 CU.FT.

## PERFORMANCE

TRIPLE COOLING (3 EVAPORATORS, 2 COMPRESSORS)	YES
POWER COOL - REFRIGERATOR	YES
POWER FREEZE - FREEZER	YES
DEFROST PROCESS - FREEZER	FROST-FREE

## EFFICIENCY

ENERGY STAR® QUALIFIED	YES
ANNUAL ENERGY CONSUMPTION	629 KWH/YEAR

## TECHNICAL DETAILS


CURRENT (A)	6
VOLTS (V)	115
FREQUENCY (HZ)	60
POWER CORD LENGTH (IN.)	78 3/4"
PLUG TYPE	120 V, 3 PRONG

## TEMPERATURE RANGES

REFRIGERATOR	34°F (1°C) TO 44°F (7°C)
REFRIGERATOR - POWER COOL	34°F (1°C)
FRESHZONE™ DRAWER	37°F (3°C) / 33°F (-1°C)
FRESHZONE™ PLUS COMPARTMENT	-8°F (-23°C) TO 33°F (1°C)
FREEZER	-8°F (-23°C) TO -5°F (-15°C)
FREEZER - POWER FREEZE	-8°F (-23°C)


### APPLIANCE DIMENSIONS

A (TOTAL WIDTH INCL. PANELS)	41 3/4" (1060 MM)
B (TOTAL DEPTH WITH 3/4" PANEL)	24 11/16" (627 MM)
B1 DEPTH WITHOUT PANEL	23 13/16" (605MM)
C (HEIGHT)	83 3/8" (2118MM)
D	41 1/4" (1048 MM)
E	48 1/2" (1232 MM)
F	22 7/16" (570 MM)
G	47 5/8" (1210 MM)

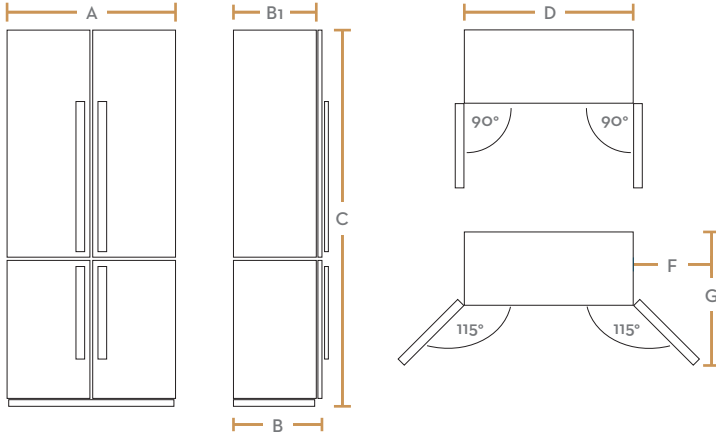


### INSTALLATION CUTOUT DIMENSIONS

	CLASSIC CUTOUT (41 1/2") WITH OVERLAY STYLE	FULL CUTOUT (42") FOR FLUSH INSTALLATION
A (WIDTH)	41.5" (1054 MM)	42" (1067 MM)
B (DEPTH)	24" (610 MM)	MIN. 25" (635 MM)
C (HEIGHT)	84" (2134 MM)	84" (2134 MM)
D	22" (559 MM)	22" (559 MM)
E	80" (2032 MM)	80" (2032 MM)

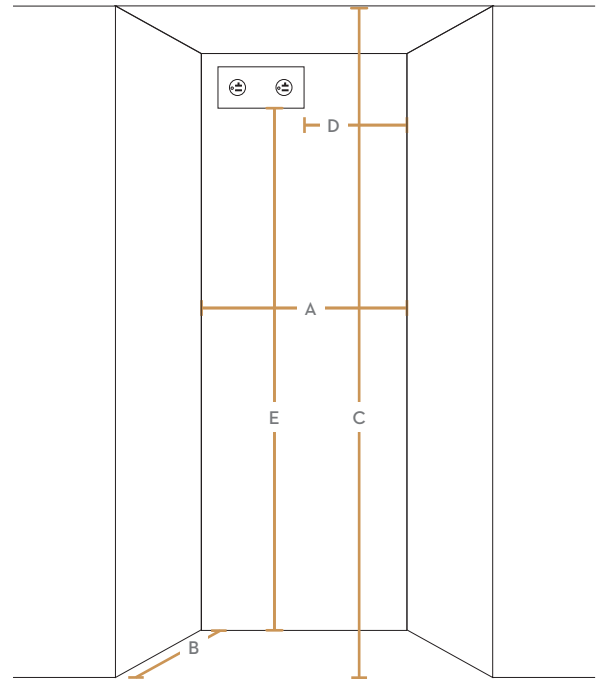

### CUSTOM PANEL SPECIFICATIONS

W1	20 25/32" (528 MM)
H1	49 3/16" (1249 MM)
H2	30 9/16" (776 MM)
G1	5/32" (4 MM)
G2	5/32" (4 MM)
STANDARD PANEL THICKNESS	3/4" (19 MM)

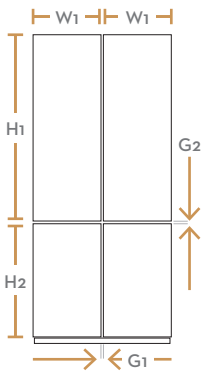

CUSTOM PANEL MAXIMUM WEIGHT FRIDGE : 55 LB (25 KG), FREEZER : 22 LB (10 KG)

Do not exceed the max load that the custom panel can endure. Before crafting the panel, check the strength of the panel's material and the load of attachments to the panel.

\* min 25" depth (depending on panel thickness)  
 — Represents cabinet cutout

### ACCESSORIES

FOUR DOOR REFRIGERATOR TRANSITIONAL PANEL KIT: SILVER STAINLESS	RAT42ACAASR
FOUR DOOR REFRIGERATOR PRO PANEL KIT: SILVER STAINLESS	RAT42AHAASR
FOUR DOOR REFRIGERATOR CONTEMPORARY PANEL KIT: GRAPHITE STAINLESS	RAT42AMAAMS
FOUR DOOR REFRIGERATOR CONTEMPORARY PANEL KIT: SILVER STAINLESS	RAT42AMAASR
FOUR DOOR REFRIGERATOR EPICURE PANEL KIT: SILVER STAINLESS	RAT42AEAASR
WATER FILTER	RAC00WFAAAA
DEODORIZING FILTER	RAC00DFAAAA

### WARRANTY

LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR	2 YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS AND LABOR	3RD TO 6TH YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS ONLY	7TH TO 12TH YEAR
LIMITED WARRANTY FOR COMPRESSOR; PARTS ONLY	13TH TO 15TH YEAR