



INSTALLATION TYPES

Nube / Nuvola / Stella / Sirio / Eclisse


01.
Motor on the hood




02.
Slim motor




03.
Remote under-roof motor




04.
Outdoor motor

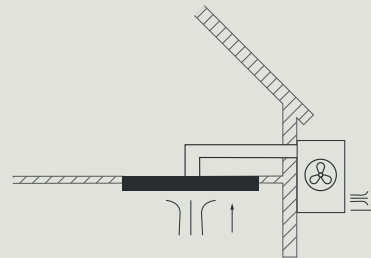

05.
Under-roof motor or outdoor motor with junction



06.
Slim motor and ceiling re-circulation filtering kit



01.
Motor on the hood
·KACL.798#41F* - 950 m³/h
·KACL.770#41F* - Brushless 1100 m³/h

02.
Slim motor on the hood
·KACL.782#49F* - Slim 800 m³/h

03.
Remote under-roof motor with round pipes
To be used with Ø150 mm pipes
·KACL.798#41F* - 950 m³/h
·KACL.770#41F* - Brushless 1100 m³/h
·KACL.797#4AF* - 1300 m³/h
To be used with Ø200 mm pipes and bracket (KACL.396)


04.
Outdoor motor with round pipes
·KACL.786#41F* - 1000 m³/h
To be used with Ø150 mm pipes
·KACL.796#4AF* - 1500 m³/h
To be used with Ø200 mm pipes and bracket (KACL.396)

05.
Under-roof motor or outdoor motor with junction on the hood and rectangular pipes
·KACL.798#41F* - 950 m³/h
·KACL.770#41F* - Brushless 1100 m³/h
·KACL.786#41F* - 1000 m³/h (outdoor motor)
·KACL.789 - Junction for rectangular pipes
·KACL.376 - Circular and rectangular Junction 220x90


06.
Slim motor and ceiling re-circulation filtering kit
The new ceiling re-circulation filtering kit allows the installation of all ceiling hoods (Eclisse/ Nube/ Nuvola/Stella) in filtering mode. The ceiling re-circulation filtering kit can be used only with a slim motor placed on the hood and rectangular pipes.
·KACL.953
·KACL.939#BF - Ceiling re-circulation
·KACL.782#49F* - Slim 800 m³/h

*European code

Directional air outlets



Motor
5 directions



Slim motor
4 directions
(According to the position of the motor)