

Miele

Under-Counter Refrigerator

K 31222 Ui



Shown: K31222Ui under counter with Euro models of DGC 6800 over H6800BM
Please note: This information is subject to change

mieleusa.com
Specification Sheet TRS 05112018

Under-Counter Refrigerator



SPECIFICATIONS	
Overall Unit Dimensions	23 ¹ / ₂ " (597 mm) W x 32 ⁵ / ₁₆ " — 34 ⁵ / ₈ " (820 — 880 mm) H x 21 ⁵ / ₈ " (550 mm) D
Door Clearance	23 ¹ / ₂ " (597 mm)
Niche	
Minimum Cabinet Opening Dimensions	23 ⁵ / ₈ " (600 mm) W x 32 ⁵ / ₁₆ " (820 mm) H x 21 ⁵ / ₈ " (550 mm) D
Interior Volume	
Refrigeration Volume	4.8 cu-ft (136 L)
Electrical	
Electrical Requirements	110V / 120V, 60Hz, 15 Amps (single) 110V / 120V, 60Hz, 20 Amp (side-by-side)
Power Cord	NEMA 5-15 plug, 6' 6 ³ / ₄ " (2 m)
Custom Panel	
Maximum Panel Weight	22 lbs (10 kg)
Maximum Panel Thickness	⁵ / ₈ " (16 mm)
Minimum Panel Thickness	³ / ₄ " (19 mm)
Shipping	
Shipping Weight	116.8 lbs. (53 kg)
Support	
Call Miele	800.843.7231
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com




K 31222 Ui - Right Hinged
(In Field Convertible)
Item 36312220USA


Under-Counter Refrigerator

PRODUCT DIMENSIONS

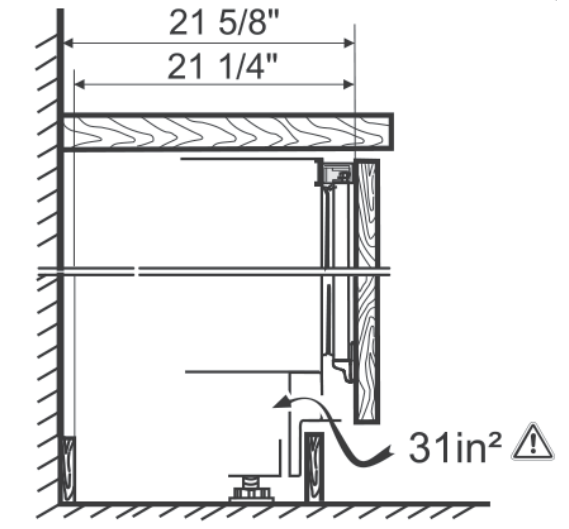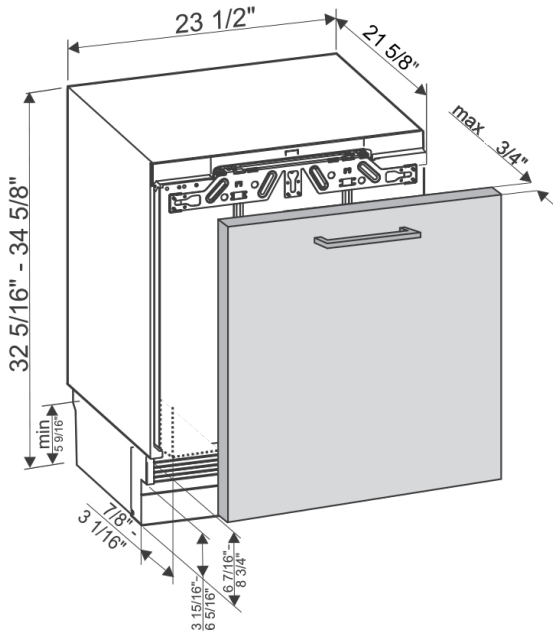


 Dimensions for ventilation

NICHE DIMENSIONS

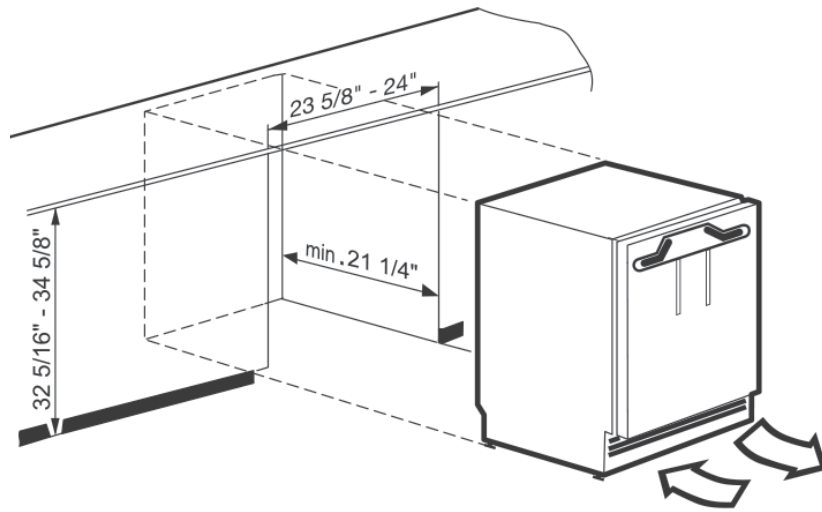

Under-Counter Refrigerator

CUSTOM DOOR PANEL

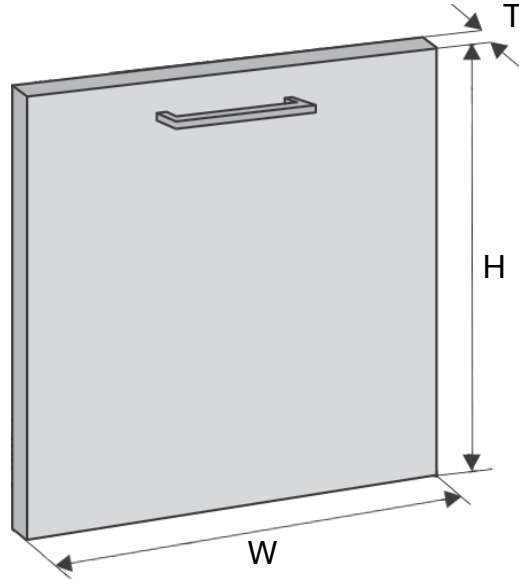

Panel Dimensions	
Height (H)	
Minimum	25 ⁷ / ₈ " (657 mm)
Maximum	30 ¹¹ / ₁₆ " (780 mm)
Width (W)	
Minimum	23 ³ / ₈ " (594 mm)
Maximum	25 ¹ / ₈ " (638 mm)
Thickness (T)	
Minimum	⁵ / ₈ " (16 mm)
Maximum	³ / ₄ " (19 mm)
Weight	
Maximum	22 lbs (10 kg)
Toekick Dimensions	
Min. Toekick	3 ¹⁵ / ₁₆ " (100 mm)
Max. Toekick	6 ⁵ / ₁₆ " (160 mm)