

Today's open-living concepts integrate rooms and broad vistas. CIRRUS GRANDE fits in with its linear, discrete, and virtually out of sight design that won't get in the way of any vista.

SIZE	MODEL NO.	GREASE FILTERS (replacement)
63½ in.	CC34IQ63SB	B08087836 (4 required)

PERFORMANCE						
Duct Orientation	Size	Damper	CFM @ 0.1 Ps	CFM @ 0.1 Ps	Sones	Sones
Horizontal - Round	8 in.	Included	(Max. speed) 600 ‡	(Normal Speed) 140	(Max. Speed) 9.0	(Normal Speed) < 0.3

‡ If needed, ask a recommended installer to limit discharge to 300 CFM or 400 CFM.

FEATURES	
Finish	430 Stainless Steel no. 4 Brushed
Mounting type	Ceiling
Blower type	iQ6 with High-Efficiency BLDC motor
Control type	5 Push buttons: <ul style="list-style-type: none"> Lights, on/low/medium/high/off Blower on/increase and blower off/decrease Delay-off Timer Filter Clean Indicator reset
Remote Control	ACR3 included
Filter Clean Indicator	Reminds when grease filters should be cleaned
Lighting	3-level LED (4 lamps included, 9 W each)
Grease Filters	Dishwasher-safe, mesh filters


AC INPUT
120 V, 60 Hz - 4.6 AMPS

OPTIONAL ACCESSORIES (sold separately)	
Make-up Air Dampers	MD6T, MD8T, MD10T
Non-Ducted Recirculation Kit	ANKCC3463
Charcoal Filters	AFCCC3463


RECOMMENDED MOUNTING HEIGHT
48-in min. from cooktop to bottom of hood

LIMITED WARRANTY
5-year
2-year (labour only)
(See installation manual for full warranty text.)

FOR INDOOR USE ONLY

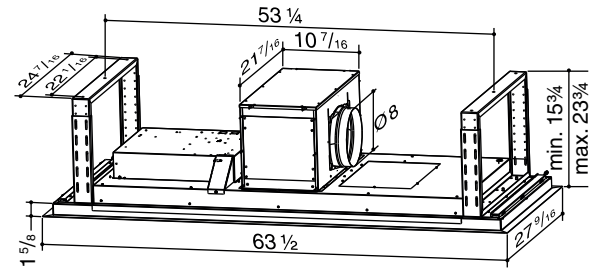

NOTE: Dimensions shown in inches.

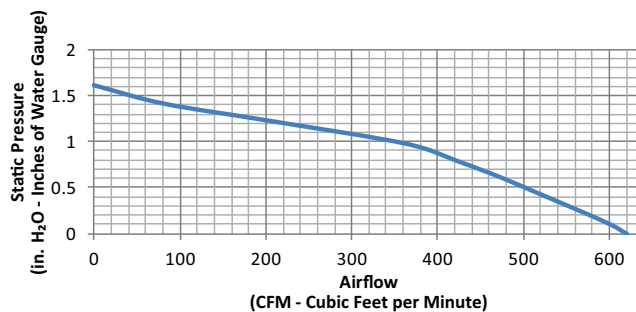

IQ6 BLOWER FEATURES	
Quiet Operation	Best in Class
Smoke / Odor Removal	Up to 30% faster than comparable models
Energy Efficiency	Up to 22 times more than comparable models
Guaranteed Performance System (GPS) technology	Calibrated hood system to every installation - providing 30% more CFM than standard range hoods.*

* Using a duct reducer with this hood may prevent the product from calibrating.

SPECIFICATION SHEET
CC34IQ63SB



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



Avec les concepts décos à aire ouverte d'aujourd'hui, CIRRUS GRANDE se fondra parfaitement dans le décor grâce à son design linéaire, discret et pratiquement invisible. Elle ne fera pas obstacle au style épuré de votre espace de vie.

LARGEUR	N° DE MODÈLE	FILTRES À GRAISSES (remplacement)
63 1/2 po	CC34IQ63SB	B08087836 (4 requis)

PERFORMANCE						
Orientation du conduit	Format	Volet	pi³/min @ 0,1 Ps	pi³/min @ 0,1 Ps	Sones	Sones
Horizontal - Rond	8 po	Inclus	(Vitesse max.) 600 ‡	(Vitesse normale) 140	(Vit. max.) 9,0	(Vit. normale) < 0,3

‡ Si requis, demander à un installateur recommandé de limiter l'évacuation à 300 pi³/min ou 400 pi³/min.

CARACTÉRISTIQUES	
Fini	Acier inoxydable 430 n° 4 brossé
Type d'installation	Au plafond
Type de ventilateur	iQ6 avec moteur BLDC à haute efficacité
Type de commande	5 boutons-poussoirs : <ul style="list-style-type: none"> Éclairage allumé/bas/moyen/élevé/éteint Ventilateur activé/augmente la vitesse et ventilateur désactivé/diminue la vitesse Minuterie d'arrêt différé Mise à zéro indicateur entretien des filtres
Indicateur d'entretien des filtres	Indique lorsque les filtres à graisses doivent être nettoyés
Éclairage	DEL à 3 niveaux (4 lampes incluses, 9 W chacune)
Filtres à graisses	Métalliques, lavables au lave-vaisselle



ALIMENTATION CA	
120 V, 60 Hz - 4,6 A	

ACCESSOIRES OPTIONNELS (vendus séparément)	
Dispositifs d'apport d'air	MD6T, MD8T, MD10T
Ensemble de recirculation	ANKCC3463
Filtres à charbon	AFCCC3463

HAUTEUR D'INSTALLATION RECOMMANDÉE	
48 po min. de la surface de cuisson au bas de la hotte	

GARANTIE LIMITÉE	
5 ans	
2 ans (main-d'œuvre)	
<i>(Voir le manuel d'installation pour le texte complet de la garantie.)</i>	

POUR UTILISATION À L'INTÉRIEUR SEULEMENT

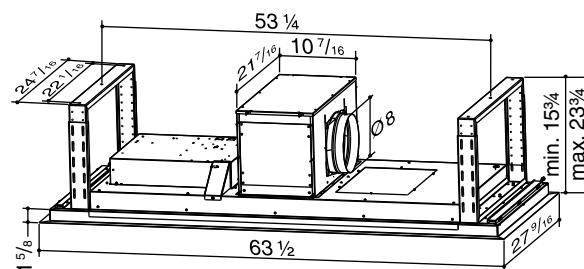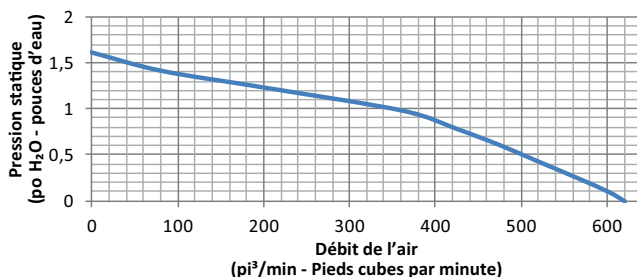

NOTE : Les dimensions indiquées sont en pouces.

CARACTÉRISTIQUES DU VENTILATEUR IQ6	
Fonctionnement silencieux	Le meilleur de sa catégorie
Évacuation des odeurs et de la fumée	Jusqu'à 30% plus rapide que les modèles comparables
Efficacité énergétique	Jusqu'à 22 fois plus efficace que les modèles comparables
Technologie <i>Guaranteed Performance System</i> (GPS)	Calibre la hotte pour atteindre un débit jusqu'à 30% plus élevé que les hottes de cuisinière courantes.*

* L'utilisation d'un réducteur de conduit avec cette hotte pourrait nuire à la calibration.