



Powered by the exclusive iQ Blower System with GPS Technology for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood

Perimeter aspiration provides superior ventilation, backed up by mesh grease filters

Four-speed electronic light-touch controls are operated with the ACR3 remote control, included

Four 3-watt LED light strips provide bright cooktop lighting

Stainless Steel panels for a designer look

10-minute delay-off and filter clean reminder provide convenient operation

Designed to work with optional Automatic make-up air dampers

#### Model Numbers:


CC34IQ63SB

CC34IQT63SB

CC34E63SB



Panels provide perimeter aspiration and conceal washable grease filters.



Bright, energy-efficient LED lighting.



Central control button with LED indicator ring.



Included ACR3 remote control lets the busy cook stay in control from anywhere in the kitchen.

### Hood Sizes

**Width** 63"

**Depth** 27-1/2"

### Finish

Stocked Brushed Professional Grade Stainless Steel

Special Order Not Available

### Features

Lighting Type LED

Number of Lamps 4 Light strips (9 watts each, 380 lux each, 2800-3200K)

Lighting Levels 3

Lighting Lamps Included Yes

Control Type 4-speed Electronic Light Touch

Control Features Delay-off, Filter Clean Reminder

Remote Control ACR3 Included

Filter Type Mesh Grease Filter with Perimeter Aspiration

Non-ducted Capability Yes

### Hood Blower Included (CC34IQ63 and CC34IQT63)

Internal	iQ6	iQ12
Blower CFM	600	1200
Sones Low/High	0.3/8.0	0.6/11.5

### Hood Blower Options (CC34E blowers sold separately)

*External In-line:	ILB3	ILB6	ILB9	ILB11
Max CFM	280	600	800	1100
*External Exterior:	EB6	EB9	EB12	EB15
Max CFM	600	900	1200	1500


\*Sone levels using External blowers are typically half of comparable CFM Internal blowers.

### Accessories


Non-ducted Kit	ANKCC34 63
Charcoal Replacement Filters	AFCCCE34 63
Automatic MUA Damper	MD6T, MD8T, MD10T (Requires Fresh Air Inlet)
Fresh Air Inlet	641FA, 643FA, 610FA

### Installation Requirements


Electrical Amps @ 120V	Internal: 4.0, External: 6.5
Electrical connection	Direct
Duct Size—Internal Blower	8" and 10" for iQ12
Duct size—External Blower	10"
Duct Direction	Horizontal Vertical (External vent only)
Backdraft Damper	Included

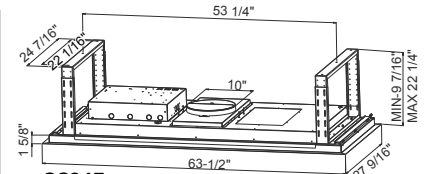

CC34E

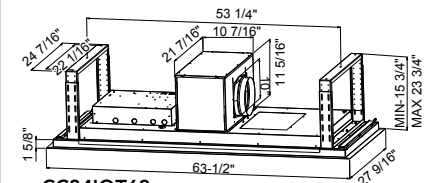

CC34IQT63

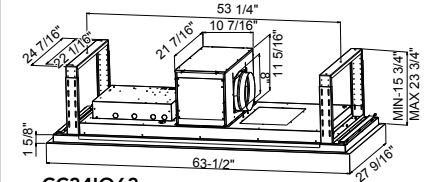

CC34IQ63

Installation height above the cooking surface 48" minimum, 72" maximum recommended.

