

# DESIGNER LINE ROLL-IN WARMER

**Model: DL2WI**

*Designer Line*

## 2-Section Roll-In Warmer with 66 1/4" Cart Capacity

**DL2WI** - Stainless steel front, aluminum end panels and interior  
**DL2WI-SA** - Stainless steel exterior, aluminum interior  
**DL2WI-SS** - Stainless steel exterior and interior



### Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)
Chrome or stainless steel shelves	<b>Correctional Facility Options</b>
Rehinging of doors (consult factory)	<ul style="list-style-type: none"> <li>• One way security screws</li> </ul>
Custom laminates	<ul style="list-style-type: none"> <li>• Locking hasp (lock not included)</li> </ul>
Half doors	<ul style="list-style-type: none"> <li>• Stainless steel mesh cover</li> </ul>
Roll-Thru	<ul style="list-style-type: none"> <li>• Coverless hinges</li> </ul>
Hinged glass doors	

Consult factory for other model configurations, options and accessories.

**Continental**<sup>®</sup>  
Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### HEATING SYSTEM

Self-contained, performance-rated "plug" heating system  
 90°F - 180°F temperature range  
 Unique air flow distribution ducts

#### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation  
 Smooth, polished chrome workflow door handles  
 Cam action, lift off hinges  
 Magnetic snap-in door gaskets  
 Cylinder lock in each door  
 Self-closing doors  
 66 1/2" high door openings (66 1/4"H rack capacity\*)

#### MODEL FEATURES

Electronic controller w/digital display & hi-low alarm  
 Removable stainless steel rack guides  
 Removable stainless steel ramps  
 Reinforced stainless steel floor

\* Racks not supplied

**IMPORTANT NOTE:** Cabinet upper side panels and heating "plug" system can be removed and reinstalled at installation site where space limitations are confining.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

Net Capacity (cu. ft.)	64 (1812 cu l)
Width, Overall (in.)	68 1/2 (1740 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Door Height (in.)	66 1/2 (1676 mm)
Height, Overall (in.)	86 (2184 mm)
No. of Doors	2
Rack Capacity** (per section)	2

### ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (incl. ground)	3
Total Amps (int'l)	13.8 (13.8)
Total Wattage @ 208-230 volts	3000
10 ft. Cord/Plug (int'l)	No (No)

### SHIPPING DATA

Height - Crated (in.)	90 (2286 mm)
Width - Crated (in.)	77 (1956 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	168 (4757 cu l)
Weight Std - Crated (lbs.)	625 (283 kg)
Weight SS - Crated (lbs.)	660 (299 kg)

\*\* Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H  
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

## Model Plan Views

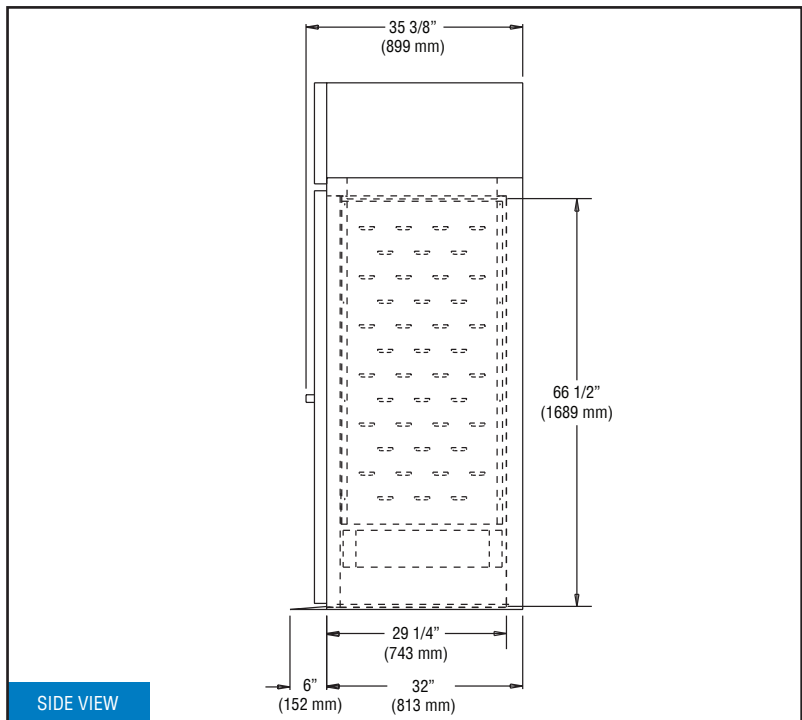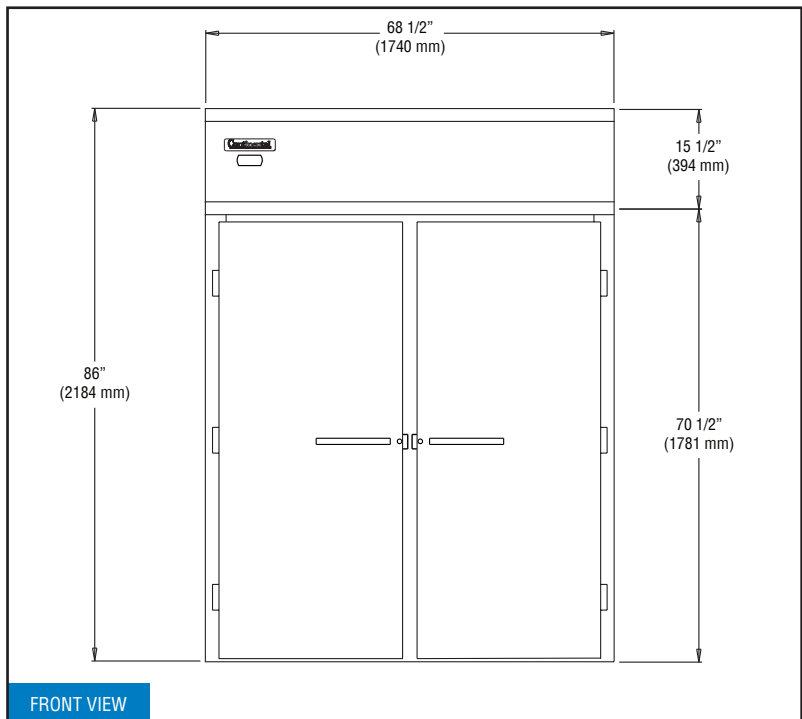

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

**Continental**  
 Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunkserry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2019, Continental Refrigerator.  
 A Division of National Refrigeration & Air Conditioning Products, Inc.